

## APPLICATIONS

- Aquifer recharge and recovery.
- Saltwater intrusion, desalination, and wastewater.
- Wetland monitoring.
- Groundwater contamination monitoring.  
Surface water monitoring.

## ADVANTAGES

- Digital sensor communicates three measurements over a serial interface.
- Precision pressure transducer for water depth measurements.
- Accurate 4-probe EC measurement.
- Robust thermistor for accurate temperature measurements.
- Low input voltage requirements.
- Low power design supports battery-operated data loggers.
- Robust marine-grade epoxy encapsulation to resist corrosive environments.
- Stainless steel cover improves durability
- Supports SDI-12 or DDI-Serial 1-wire serial communications protocols.
- Modern design optimized for low-cost sensing.
- Differential pressure measurement is referenced to atmospheric pressure so no external pressure sensor is needed.

## DESCRIPTION

The Decagon CTD sensor is a low-cost, accurate tool for monitoring water level, electrical conductivity, and temperature in both groundwater and surface water. The sensor employs a precision pressure transducer to sense water levels between 0 and 5 meters for the CTD-5 and 0 and 10 meters for the CTD-10. The sensor cable is vented to remove the effects of barometric pressure changes. The integrated 4-probe electrical conductivity transducer accurately senses EC up to 120 mS/cm. The sensor also features a precision thermistor to measure temperature. The CTD has a compact 3.4 cm diameter body made of rugged Delrin. The electronic circuitry is encapsulated in a marine-grade epoxy to protect the sensor in corrosive environments.

## AUDIENCE


Decagon provides the information in this integrators guide to help CTD customer establish communication between these sensors and their data acquisition equipment or field data loggers. Customers using data loggers that support SDI-12 sensor communications should consult the user's manual for their data logger. These sensors are fully integrated into Decagon's system of plug-and-play sensors, cellular-enabled data loggers, and data analysis software.

## MEASUREMENT SPECIFICATIONS

	CTD-5 Depth @ 20 °C	CTD-10 Depth @ 20 °C	Temperature*	Bulk Electrical Conductivity
Accuracy	±0.05% of full scale	±0.05% of full scale	±1 °C	±0.01mS/cm or ±10% (whichever is greater)
Resolution	1 mm	2 mm	0.1 °C	0.001 mS/cm
Range	0 to 5 m	0 to 10 m	-11 °C to +49 °C	0 – 120 mS/cm (bulk)

\* Measuring at temperatures below 0 °C is NOT recommended and will break the pressure transducer.

**PHYSICAL CHARACTERISTICS**


<p>SENSOR IMAGE</p>	
<p>SENSOR NAME</p>	<p>CTD-5 and CTD-10 Sensor</p>
<p>DIMENSIONS</p>	<p>9 cm X 3.4 cm</p>
<p>CABLE LENGTH*</p>	<p>5 meters</p>

\* Custom cable lengths are available for an additional cost.

**ELECTRICAL AND TIMING CHARACTERISTICS**


PARAMETER	MIN	TYP	MAX	UNITS
Supply Voltage (VCC) to GND	3.6		15	V
Digital Input Voltage (logic high)	2.8	3	3.9	V
Digital Input Voltage (logic low)	-0.3	0	0.8	V
Power Line Slew Rate				V/mS
Current Drain (during measurement)	0.5	0.5	1	mA
Current Drain (while asleep)		0.03		mA
Operating Temperature Range	-11		49	°C
Power Up Time (DDI-Serial)		475	500	mS
Power Up Time (SDI-12)	350	475	500	mS
Measurement duration		350	500	mS
Cable Capacitance / meter		147		pF
Cable Resistance / meter		34		mΩ

**EQUIVALENT CIRCUIT DIAGRAM**

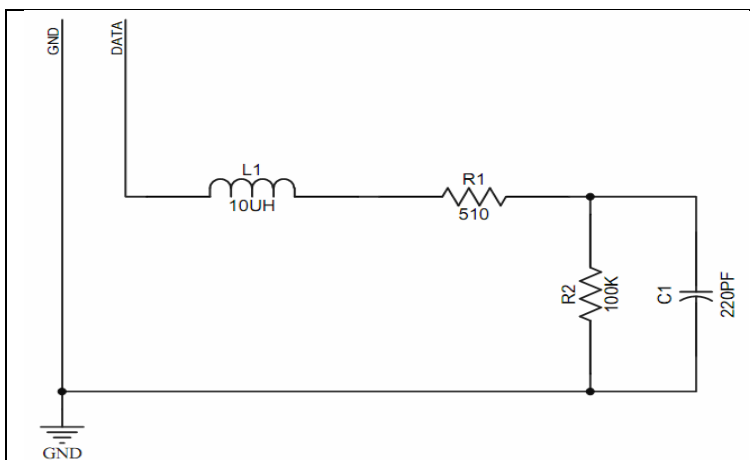

**NOTE:** This is a low impedance variant of the recommended SDI-12 Specification. This allows up to 62 sensors to be maintained on a bus.

**CONNECTION TYPES**

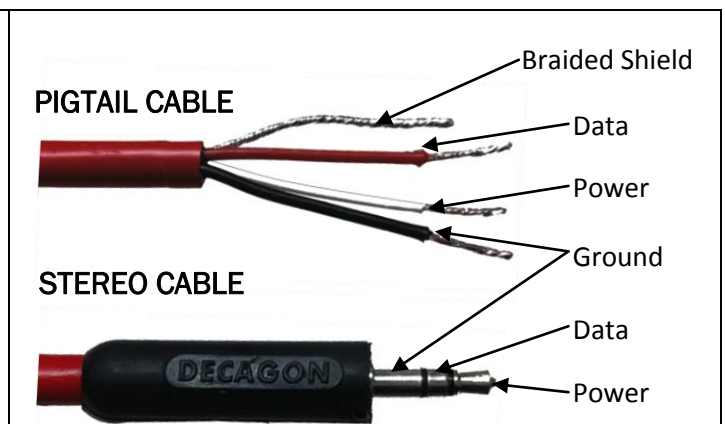

**NOTE:** The stereo cable option connects the braided shield to the ground line. On the pigtail cable option, the braided shield and ground line are disconnected. They can be connected together if crosstalk is an issue.